
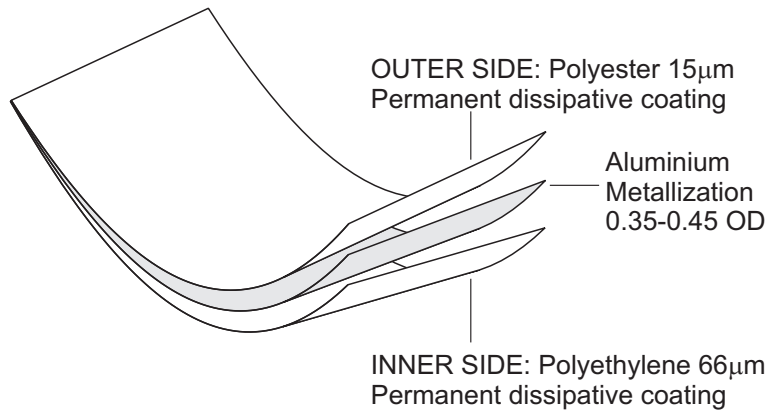


# SHIELDING POLYETHYLENE TUBING

<b>6604.264 SHIELDING</b>	85µm - 100mm width - 100m roll
<b>6604.266 SHIELDING</b>	85µm - 150mm width - 100m roll
<b>6604.268 SHIELDING</b>	85µm - 200mm width - 100m roll
<b>6604.270 SHIELDING</b>	85µm - 250mm width - 100m roll
<b>6604.272 SHIELDING</b>	85µm - 300mm width - 100m roll
<b>6604.275 SHIELDING</b>	85µm - 400mm width - 100m roll

## TECHNICAL FEATURES

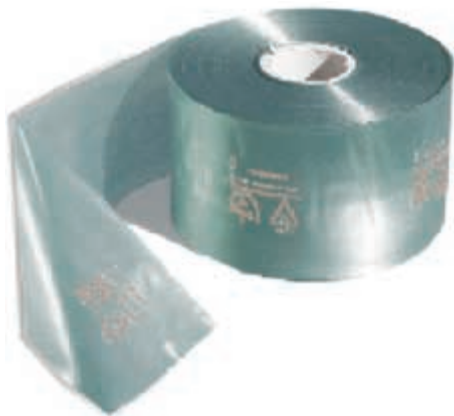

FILM THICKNESS:	85µm ±10%
TRANSPARENCY (ASTM D-1003):	40%
TENSILE STRENGTH (ASTM D-882) :	28N/mm
SIDE SEAL STRENGTH (ASTM D-882) :	3N/mm
PUNCTURE RESISTANCE:	55N (FTMS 101C )
HEAT SEALING:	150 - 250°C 0,5 - 4S 40 - 60 psi
R <sub>s</sub> outer side :	10 <sup>10</sup> - 10 <sup>11</sup> Ω
R <sub>s</sub> inner side :	10 <sup>10</sup> - 10 <sup>11</sup> Ω
Electrostatic shielding:	<25nJ (Energy Test)