


7. TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS (1/2)

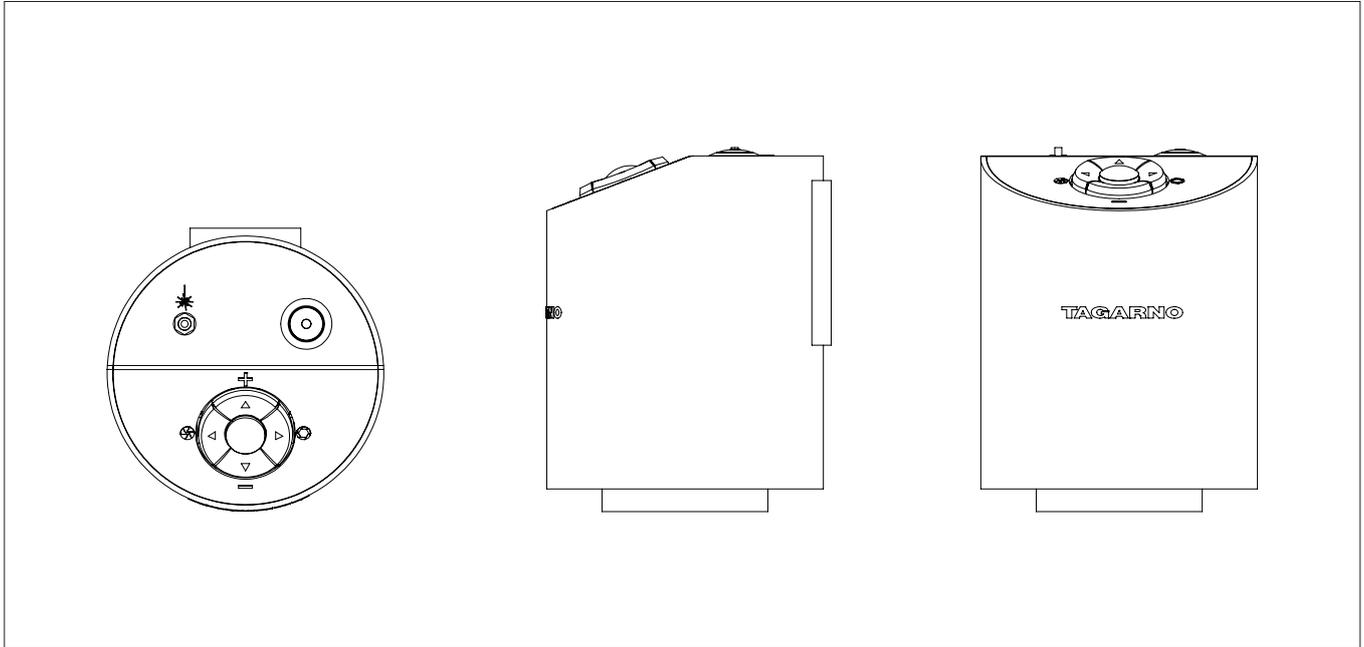

Dimensions	H: 121mm/4.76" Dia: 100mm/3.94"
Weight	1.5 kg/3.3 lbs
Camera resolution	FHD 1080p, 1920x1080p at 59,94/50/29,97/25Hz HD 720p, 1280x720p at 59,94/50Hz
Camera zoom	30x optical
Autofocus	Yes
Power consumption	7,4 W
Standby consumption	0.5W
Storage	-5 - +60°C / +23 - +140°F, 20 - 90% RH
Operation	+5 - +40°C / +41 - +104°F, 20 - 80% RH
Work height	Min: 95mm/3.74" Max: 360mm/14.17"
Work depth	Adjustable
Auto Monitor Detect	No
Plug connection	HDMI, USB 3.0 & ESD (fixed cables)

TECHNICAL SPECIFICATIONS (2/2)

FEATURES

Auto & Manual Focus	Choose monitor width	Flip picture
Iris, Gain and Preset mode	Set start magnification	Image capture, PC (with third-party software)
OSD menu	Choose format	
Choose lens	Select OSD presets	
Laser pointer (on/off)	Color boost	

LENS

Dimensions	58 mm/2.3"
Included lens	+4

LENS

	Lens to object distance	Magnification on 22" monitor
+3	333mm/13.22"	1.2x - 36.0x
+4	250mm/9.84"	1.6x - 48.0x
+5	200mm/7.87"	2.0x - 60.0x

RECOMMENDED MONITOR FORMAT

Panel format	16:9 (Widescreen)
How to link	HDMI input
Response time	2 ms
Signal format	FHD 1920x1080

ACCESSORIES

XKEY Control Box	Light Kit
HD 22" and 24" widescreen monitor	Angle brackets
Flexarm	Cleaning kit
Foot switch	