


Wiha Precision ESD.

The Static Dissipative Precision Screwdriver.




The dissipative Precision ESD protects delicate components.

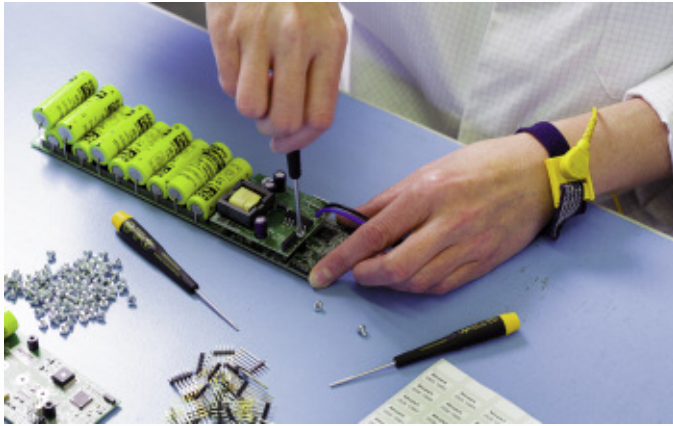

design award
winner



Wiha Precision ESD screwdrivers have a surface resistance of $10^6 - 10^9$ Ohm.

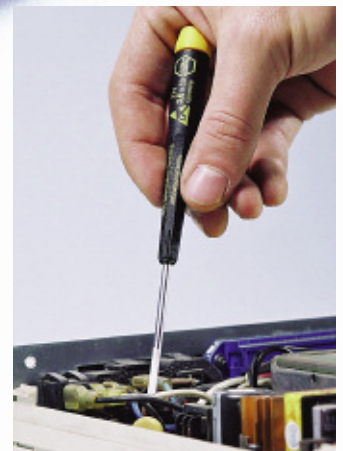

The rotating cap with contact area makes incremental adjustment quick and easy.



Wiha Precision ESD:

- Dissipative handle designed to discharge uniformly, surface resistance $10^6 - 10^9$ Ohm
- Fulfills the ESD standard IEC 61340-5-1
- Rotating cap with large surface for extra fast working
- Large handle end for powerful tightening and loosening screws
- Wiha ChromTop®-finish on tip for a perfect fit every time

For Slotted Screws.



272

Precision ESD Slotted Screwdriver. Dissipative Handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.

Handle: Precision handle with rotating cap, surface resistance $10^6 - 10^9$ Ohm.

Standards: IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Order-No.	①	↔	⊖	⦿	↔	↔	↔
07634 4	1.5	40	0.25	2.0	120	12.5	10
07635 1	2.0	40	0.40	2.0	120	12.5	10
07636 8	2.5	50	0.40	2.5	145	13.0	10
07637 5	3.0	50	0.50	3.0	145	13.0	10
07638 2	3.5	60	0.60	3.5	170	14.0	10
07639 9	4.0	60	0.80	4.0	170	14.0	10

Safety Notice:

Wiha ESD screwdrivers are non-insulated, therefore not suitable for working on live parts.



Wiha Precision ESD.

The Static Dissipative Precision Screwdriver.

For Phillips, Pozidriv Screws and Hex Nuts .



273 Precision ESD Phillips Screwdriver.
Dissipative Handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.

Handle: Precision handle with rotating cap, surface resistance 10⁶ - 10⁹ Ohm.

Standards: IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Order-No.	⊕	↔	●	↔	↔	↔
28053 6	PH000	40	2.0	120	12.5	10
07640 5	PH00	40	2.0	120	12.5	10
07641 2	PH0	50	3.0	145	13.0	10
07642 9	PH1	60	4.0	170	14.0	10



274 Precision ESD Pozidriv Screwdriver.
Dissipative Handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.

Handle: Precision handle with rotating cap, surface resistance 10⁶ - 10⁹ Ohm.

Standards: IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Order-No.	⊕	↔	●	↔	↔	↔
07643 6	PZ1	60	4.0	170	14	10



277 Precision ESD Hex Nut Driver.
Dissipative Handle, ESD-safe.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.

Handle: Precision handle with rotating cap, surface resistance 10⁶ - 10⁹ Ohm.

Standards: IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Order-No.	○	↔	↔	↔	↔	↔
32312 7	1.5	60	2.5	-	155	13.0
32313 4	2.0	60	2.9	-	155	13.0
07653 5	2.5	60	4.0	4.0	155	13.0
07654 2	3	60	5.0	5.0	155	13.0
07655 9	3.5	60	5.3	6.0	155	13.0
07656 6	4	60	5.5	6.0	155	13.0
32314 1	4.5	60	6.2	7.0	155	13.0
07657 3	5	60	6.8	7.0	155	13.0
07658 0	5.5	60	7.6	8.0	170	14.0

For Hex Sockets and TORX PLUS® Screws.



275 Precision ESD Hex Screwdriver.
Dissipative Handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.

Handle: Precision handle with rotating cap, surface resistance 10⁶ - 10⁹ Ohm.

Standards: IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Order-No.	●	↔	↔	↔	↔	↔
27707 9	0.7	40	120	12.5		10
27708 6	0.9	40	120	12.5		10
07644 3	1.3	40	120	12.5		10
07645 0	1.5	50	145	13.0		10
07646 7	2	50	145	13.0		10
07647 4	2.5	60	170	14.0		10
07648 1	3	60	170	14.0		10
32315 8	4	60	170	14.0		10



276 Precision ESD Ballpoint Hex Screwdriver.
Dissipative Handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.

Handle: Precision handle with rotating cap, surface resistance 10⁶ - 10⁹ Ohm.

Standards: IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Extra: The ballpoint enables the user to work at angles up to 25°.

Order-No.	●	↔	↔	↔	↔	↔
07649 8	1.5	50	145	13.0		10
07650 4	2	50	145	13.0		10
07651 1	2.5	60	170	14.0		10
07652 8	3	60	170	14.0		10



278IP Precision ESD TORX PLUS® Screwdriver.
Dissipative Handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.

Handle: Precision handle with rotating cap, surface resistance 10⁶ - 10⁹ Ohm.

Standards: IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Order-No.	●	↔	↔	↔	↔	↔
28198 4	4IP	40	2.5	120	12.5	10
27761 1	5IP	40	2.5	120	12.5	10
27762 8	6IP	40	2.5	120	12.5	10
27763 5	7IP	40	2.5	120	12.5	10
27764 2	8IP	40	2.5	120	12.5	10
27765 9	9IP	50	3.0	145	13.0	10
27766 6	10IP	50	3.0	145	13.0	10
27767 3	15IP	60	3.5	170	14.0	10

For TORX® Screws. Chip Lifter.



278 Precision ESD TORX® Screwdriver.
Dissipative Handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.

Handle: Precision handle with rotating cap, surface resistance 10⁶ - 10⁹ Ohm.

Standards: IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Order-No.	⊕	↔	●	↔	↔	↔
21256 8	T3	40	2.5	120	12.5	10
21255 1	T4	40	2.5	120	12.5	10
07659 7	T5	40	2.5	120	12.5	10
07660 3	T6	40	2.5	120	12.5	10
07661 0	T7	40	2.5	120	12.5	10
07662 7	T8	40	2.5	120	12.5	10
07663 4	T9	50	3.0	145	13.0	10
07664 1	T10	50	3.0	145	13.0	10
07665 8	T15	60	3.5	170	14.0	10
07666 5	T20	60	4.0	170	14.0	10



278R Precision ESD TORX® MagicSpring® Screwdriver.
Dissipative Handle, ESD-safe.
Retaining Spring holds TORX® Screws in Place.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
Wiha ChromTop® finish on tip for a perfect fit every time.

Handle: Precision handle with rotating cap, surface resistance 10⁶ - 10⁹ Ohm.

Standards: IEC 61340-5-1.

Application: For working on electrostatically sensitive components.

Order-No.	⊕	↔	●	↔	↔	↔
27748 2	T6	40	2.5	120	12.5	10
27749 9	T7	40	2.5	120	12.5	10
27759 8	T8	40	2.5	120	12.5	10
27750 5	T9	50	3.0	145	13.0	10
27751 2	T10	50	3.0	145	13.0	10
27752 9	T15	60	3.5	170	14.0	10



279-10 Precision ESD Chip Lifter.
Dissipative Handle, ESD-safe.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.

Handle: Precision handle, surface resistance 10⁶ - 10⁹ Ohm.

Standards: IEC 61340-5-1.

Application: For lifting tight parts on circuit boards.

Order-No.	↔	↔	↔	↔	↔
07667 2	3.5	50	145	13.0	10

ESD Screwdriver Sets.



272 K6 Precision ESD Slotted/Phillips Screwdriver Set, 6 pcs.
Dissipative Handle, ESD-safe.

Order-No.	Series	↔
08463 9	272 K6	1
Ⓜ	272	1.5x40 2.0x40 2.5x50 3.0x50
⊕	273	PH00x40 PH0x50

278 K6 Precision ESD TORX® Screwdriver Set, 6 pcs.
Dissipative Handle, ESD-safe.

Order-No.	Series	↔
26919 7	278 K6	1
⊕	278	T5x40 T6x40 T7x40 T8x40 T10x50 T15x60

275 K6 Precision ESD Hex Screwdriver Set, 6 pcs.
Dissipative Handle, ESD-safe.

Order-No.	Series	↔
32278 1	275 K6	1
●	275	0.9x40 1.3x40 1.5x50 2x50 2.5x60 3x60

277 K6 Precision ESD Hex Nut Driver Set, 6 pcs.
Dissipative Handle, ESD-safe.

Order-No.	Series	↔
32279 3	277 K6	1
○	277	2.5x60 3x60 3.5x60 4x60 5x60 5.5x60