


- AC1102 Extension 300mm (1') long

Tip Extraction

The new BTX-208 is an electric driven tip extraction unit which can provide fume extraction for up to 8 stations. The filter unit itself and the connection accessories are designed for easy planning and installation.

Steps:

- Plan facility layout in groups of up to 8 stations
- Select a duct connection kit, based on
 - number of stations
 - layout of stations: single row or double row of benches
 - length of ducting
- If needed, supplement the connection kit with individual components, as for example additional length of hose.
- Select the iron adapter kit which includes the vacuum tubing from the iron to the main duct.

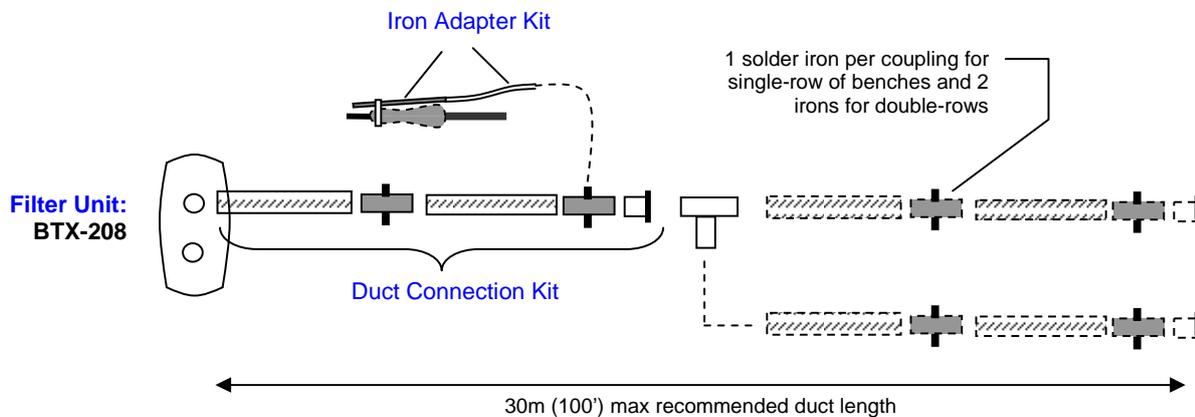

Description		Connection Kits		
		BTX-CK2-25	BTX-CK4-50	BTX-CK4-75
Max number of stations	single-row bench	2	4	4
	double-row bench	4	8	8
		Qty	Qty	Qty
Flexible hose Ø 35mm (1.375")		2.5m (8')	5.0m (16')	7.5m (25')
Coupling with two glands 5.6mm		2	4	4
End plug		1	2	2
T-piece connector for 35mm hose		0	1	1
Pipe clip		2	5	5
Roll of vinyl tape		1	1	1

The connection kits are provided with 1 piece of flexible hose and with the length as specified above. When installing, the hose needs to be cut at site into the various section lengths as needed. This assures the most economical use of the hose.

If needed, the connection kits can be supplemented with individual components as listed in the following table.