## Wiha SoftFinish<sup>®</sup> ESD.

For Use on Electrostatically Sensitive Components.



The SoftFinish<sup>®</sup> ESD screwdrivers feature an ergonomic multi-component handle.




# Wiha SoftFinish® ESD:

- Dissipative handle designed to discharge uniformly, surface resistance 10^6 - 10^9 Ohm
- Fulfils the ESD standard IEC 61340-5-1
- Ergonomic SoftFinish<sup>®</sup> multi- component handle guarantees comfortable work and optimised handling
- Blade made of high-quality chromevanadium-molybdenum steel, through hardened and chrome plated
- Wiha ChromTop® blade tip ensure a perfect fit in every screw head

Safety Notice: Wiha ESD screwdrivers are noninsulated, therefore not suitable for working on live parts.

### For Slotted, Phillips and Pozidriv Screws.

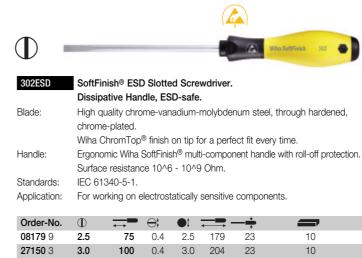

081799	2.5	/5	0.4	2.0	179	23	10
<b>27150</b> 3	3.0	100	0.4	3.0	204	23	10
27151 0	4.0	100	0.8	4.0	211	30	10
<b>08182</b> 9	5.5	125	1.0	5.5	236	30	10
<b>08183</b> 6	6.5	150	1.2	6.0	268	36	10



311ESD	SoftFinish® ESD Phillips Screwdriver.
	Dissipative Handle, ESD-safe.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
	Wiha ChromTop <sup>®</sup> finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection Surface resistance 10^6 - 10^9 Ohm.
Standards:	IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.
<b>a</b> · · · ·	

Order-No.	$\oplus$	$\rightarrow$	•1			<b>—</b>	Order-No.	$\oplus$	$\rightarrow$		$\overrightarrow{}$		<b>—</b>
<b>08184</b> 3	PH0	60	3.0	164	23	10	<b>32154</b> 3	PH01	25	4.5	81	34	10
<b>08185</b> 0	PH1	80	4.5	191	30	10	<b>32155</b> 0	PH02	25	6.0	81	34	10
<b>08186</b> 7	PH2	100	6.0	218	36	10							



313ESD	SoftFinish <sup>®</sup> ESD Pozidriv Screwdriver. Dissipative Handle, ESD-safe.		SoftFinish <sup>®</sup> ESD Pozidriv Screwdriver Stubby. Dissipative Handle, ESD-safe.				
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop <sup>®</sup> finish on tip for a perfect fit every time.	chrome-plated.	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time.				
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Surface resistance 10^6 - 10^9 Ohm.	landle: Ergonomic Wiha So	oftFinish® multi-component handle with roll-off protection. 10^6 - 10^9 Ohm.				
Standards:	IEC 61340-5-1.	tandards: IEC 61340-5-1.	IEC 61340-5-1.				
Application:	For working on electrostatically sensitive components.	pplication: For working on ele	For working on electrostatically sensitive components.				
Order-No. 26928 9	⊕ → → →   PZ0 60 3.0 164 23 10	Order-No. ⊕●	<b>●</b> ; <del></del> <b></b> 4.5 81 34 10				

**32157** 4

PZ02

Order-No.	-	$\rightarrow$				
<b>26928</b> 9	PZ0	60	3.0	164	23	10
<b>26929</b> 6	PZ1	80	4.5	191	30	10

### For Slotted, Phillips and Pozidriv Screws.



302ESD	SoftFinish® ESD Slotted Screwdriver Stubby.
	Dissipative Handle, ESD-safe.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened,
	chrome-plated.
	Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
	Surface resistance 10^6 - 10^9 Ohm.
Standards:	IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.

Order-No.	$\oplus$	$\rightarrow$	⊖ţ			<b>—</b>	-
<b>32151</b> 2	4.0	25	0.8	4.0	81	34	10
<b>32152</b> 9	5.5	25	1.0	5.5	81	34	10
<b>32153</b> 6	6.5	25	1.2	6.5	81	34	10



311ESD	SoftFinish <sup>®</sup> ESD Phillips Screwdriver Stubby.
	Dissipative Handle, ESD-safe.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
	Wiha ChromTop® finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Surface resistance 10^6 - 10^9 Ohm.
Standards:	IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.



6.0

81

34

25



### Wiha SoftFinish<sup>®</sup> ESD.

For Use on Electrostatically Sensitive Components.

#### For TORX<sup>®</sup> Screws. ESD Bit Holder.



362ESD	SoftFinish® ESD TORX® Screwdriver.
	Dissipative Handle, ESD-safe.
Blade:	High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated.
	Wiha ChromTop <sup>®</sup> finish on tip for a perfect fit every time.
Handle:	Ergonomic Wiha SoftFinish <sup>®</sup> multi-component handle with roll-off protection Surface resistance 10^6 - 10^9 Ohm.
Standards:	IEC 61340-5-1.
Application:	For working on electrostatically sensitive components.

Order-No.	۲	$\leftrightarrow$		╤,	— <b>÷</b>	_
<b>31432</b> 3	Т3	60	2.5	164	23	10
<b>27148</b> 0	T4	60	2.5	164	23	10
27641 6	T5	60	3.5	164	23	10
<b>27149</b> 7	Т6	60	3.5	164	23	10
<b>31901</b> 4	T7	60	3.5	164	23	10
<b>22436</b> 3	Т8	60	3.5	164	23	10
<b>27145</b> 9	Т9	60	4.0	171	30	10
<b>27144</b> 2	T10	80	4.0	191	30	10
<b>27146</b> 6	T15	80	4.0	191	30	10
<b>27147</b> 3	T20	100	4.0	218	36	10

### ESD Sets.

 $\bigcirc$ 

Ð



#### 302ESD HK5 01 SoftFinish® ESD Slotted/Phillips Screwdriver Set, 5 pcs. Dissipative Handle, ESD-safe. Blade: High quality chrome-vanadium-molybdenum steel, through hardened, chrome-plated. Wiha ChromTop® finish on tip for a perfect fit every time. Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection. Surface resistance 10^6 - 10^9 Ohm. Standards: IEC 61340-5-1. Application: For working on electrostatically sensitive components.

Order-No.	Series			_	
<b>27252</b> 4	302ESD H	1			
$\oplus$	302ESD	3.0x100	4.0x100		
$\oplus$	311ESD	PH0x60	PH1x80	PH2x100	



387ESD	ESD Bit Holder with Handle, Quick Release Holder, 1/4".
Handle:	Wiha SoftFinish® multi-component handle with roll-off protection.
Standards:	DIN 3126, ISO 1173, style D 6.3.
Bit holder:	Stainless steel with strong magnet.
Application:	Suitable for all current screw fittings.
	All-purpose compact screwdriver together with 1/4" bits
Extra:	Together with Wiha countersink bits, can be used as manual deburrer.

Order-No.	0		- =		<b>—</b>
32161 1	1/4	35	125	36	10

	Wiha SoftFinish® ESD		and the second se	The second se		
)	a and a second s	•			•	
ESD K5	SoftFinish <sup>®</sup> ESD TORX <sup>®</sup> Scr		Set, 5	ocs.		

362ESD K5	SoftFinish <sup>®</sup> ESD TORX <sup>®</sup> Screwdriver Set, 5 pcs.							
	Dissipativ	e Handle,	ESD-safe.					
Blade:	High quality chrome-vanadium-molybdenum steel, through hardene							
chrome-plated.								
	Wiha Chro	mTop® fini	sh on tip for	a perfect fit	t every time.			
Handle:	Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.							
	Surface re	sistance 10	^6 - 10^9 (	Dhm.				
Standards:	IEC 61340-5-1.							
Application:	For working on electrostatically sensitive components.							
Order-No.	Series				1	<b>—</b>		
27253 1	362ESD K	5				1		
۲	362ESD	T6x60	T8x60	T9x60	T10x80	T15x80		