BTX-208 Portable Tip Extraction Unit





Key Features & Benefits

- ▶ High performance extraction directly from the tip of any iron
- ▶ Easy extraction network configuration for up to 8 benches
- ▶ Complete portability. Designed for under-bench installation
- ▶ Main filter has a HEPA efficiency of 99.97% at 0.3 micron, and an activated carbon filter to remove gases
- ▶ Both pre- and main- filters can be changed independently
- ▶ Plug-and-play ducting system for simple, flexible low cost solution and fast installations
- Universal hose connection kit

Part No.	Description
BTX-208	Filter Unit for 8 Tip Extraction Stations, Pre/HEPA/Gas
Filters	
FP-BVX200	Pre-Filters (pack of 5)
FM-BVX200	Main Filter, HEPA 99.95% / Carbon


CONNECTION KITS:

BTX-CK2-25	Connection Kit for 2-4 stations with 2.5m (8') Long Hose
BTX-CK4-50	Connection Kit for 4-8 stations with 5m (16') Long Hose
BTX-CK4-75	Connection Kit for 4-8 stations with 7.5m (25') Long Hose

Individual Parts

CH0121	1	Flexible Hose Ø35mm x 2.5m (8') Long
CH0122	1	Flexible Hose Ø35mm x 5m (16') Long
CH0123	1	Flexible Hose Ø35mm x 7.5m (25') Long
AC-TX001-4	2	Couplings with 2 Glands 5.6mm (pack of 4)
18566S-5	3	End Plug (Pack of 5)
AC-TX002-2	4	T-Piece Connector (pack of 2)
19115S-10	5	Pipe Clip (pack of 10)

CONNECTION KITS BTX-	CK2-25 BTX-CK4-50	BTX-CK4-75
Max number of stations single-row bench	2 4	4
when using 5.6mm tubes double-row bench	4 8	8
	Qty Qty	Qty
1 Flexible Hose Ø35mm (1.25") 2.5	m (8") 5.0m (16")	7.5m (25')
Coupling with 2 Glands 5.6mm	2 4	4
3 End Plug	1 2	2
4 T-piece Connector	0 1	1
5 Pipe Clip	2 5	5
- Roll of Vinyl Tape	1 1	1

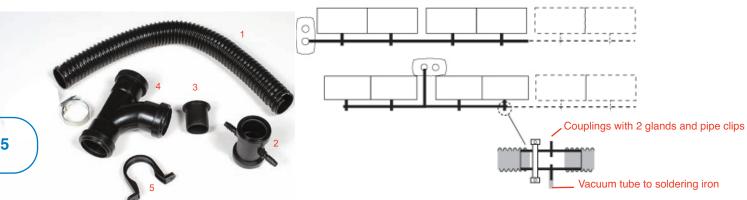





Iron Adapter Kits

<u>.</u>		
AC-FX1		Universal tip extraction iron adapter clip includes:
	6	2 x universal clips (replacement part: BTX-UC01 - Pack of 10)
	7	1 x silicon hose (replacement part: 18574S-5 - Pack of 5)
		1 x cleaning brush (replacement part: DS03-910-5 - Pack of 5)
	8	1 x stainless tube (replacement part: 20233S-5 - Pack of 5)
		4 x S clips (replacement part: 20237S-10- Pack of 10)
		1 x connecting gland (replacement part: 18576S-5 - Pack of 5)

Other tip extraction iron adapter kits available: www.okinternational.com/product_fume/btx_208

Technical Specifications

Max. number of stations	8
Flow Rate per station	>28 l/min
Noise Level	< 55 db A
Dimensions (W x D x H)	508mm x 254mm x 388mm (20" x 10" x 15.3")
Weight	9kg (20lbs)
Voltage	100-240 VAC
Frequency	50-60 Hz
Power	85 Watt
Max Duct Run	30m (100')
Certification	UL/CSA/CE

EC1800 Exhaust Cabinet



The EC1800 is an ideal bench top exhaust cabinet for applications such as volatile vapors and gases with high toxic levels.

A hinged and clear viewing panel maintains excellent visibility while at the same time reducing the airflow demand on the cabinet.

Key Features & Benefits

- ▶ Bench Top exhaust cabinet
- Offers operators high levels of protection
- Easy Assembly
- Dimensions (W x D x H) 760 x 510 x 560mm (30" x 20" x 22")
- ▶ Connection Flange Ø100mm (4")
- Requires MFX-2200G-A/D Gas Fume Filtration System (page 29)

Part No.	Description
EC1800	Exhaust Cabinet with clear viewing panel
CH0047	Connection hose 2.5m (8') Long Ø100mm (4") with Clamps